

GS-1 Respirable Dust Cyclone

Equivalent Design to 10-mm Nylon Cyclone Without Static Concerns

▶ **2 L/min flow rate provides sharp size selection at 4 µm**

- Meets ISO 7708/CEN criteria and OSHA silica rule; suitable for ACGIH respirable TLVs

▶ **Use at 1.7 or 2 L/min with DPM Cassette for MSHA DPM compliance sampling**

- Screens out large particles to prevent DPM Cassette impactor and filter overload

▶ **Conductive plastic construction**

- Eliminates electrostatic effects experienced with the 10-mm nylon cyclone
- Not a spark hazard for underground mine use



Sample Time:	Varies
Sample Rate:	2 L/min for 4-µm cut-point [‡] (OSHA silica rule) 3 L/min for 3.5-µm cut-point [‡] (MSHA for silica standard) 1.7 or 2 L/min with DPM cassette (MSHA DPM sampling)
Sample Pump:	Universal XR or AirChek Series
Sample Media:	DPM Cassette or 37-mm filters in 3-piece cassettes
Tubing:	1/4-inch ID

The 10-mm SKC GS-1 Cyclone is used with a 25 or 37-mm three-piece cassette with filter for collecting respirable dust particles. A removable cassette adapter is available in 25 or 37-mm diameter to hold a filter cassette securely during sampling. The GS-1 Cyclone can be used with the SKC DPM Cassette for MSHA DPM compliance sampling. *See box at right.*

The conductive plastic GS-1 Cyclone provides sampling efficiency equivalent to the non-conductive 10-mm nylon cyclone used for respirable dust collection while eliminating static effects and providing for safe use underground.

[‡] Trakumas, S., et al., "Performance Assessment of Personal Respirable Cyclone Samplers," AIHce Presentation 191, 2003, <http://bit.ly/1NW1wgf> (PowerPoint presentation)

Using the GS-1 Cyclone with the SKC DPM Cassette


Use the GS-1 Cyclone with the SKC DPM Cassette at 1.7 to 2 L/min for sampling in atmospheres where it is necessary to differentiate diesel particulate matter from other respirable dust (such as coal dust) based on particle size. The GS-1 Cyclone prevents particles > 4 microns from clogging the DPM Cassette's built-in impactor (precision sapphire orifice) that screens out particles ≥ 1 micron. Particles < 1 micron collect on a heat-treated quartz filter inside the cassette.



GS-1 Respirable Dust Cyclone Equivalent Design to 10-mm Nylon Cyclone Without Static Concerns

GS-1 Performance

The GS-1 Cyclone conforms to the ISO 7708/CEN criteria for particle size selection with a 50% cut-point of 4 μm at 2 L/min[†] (bias within ISO/OSHA/NIOSH requirements). It may be used at other flow rates to achieve cut-points for alternate applications.

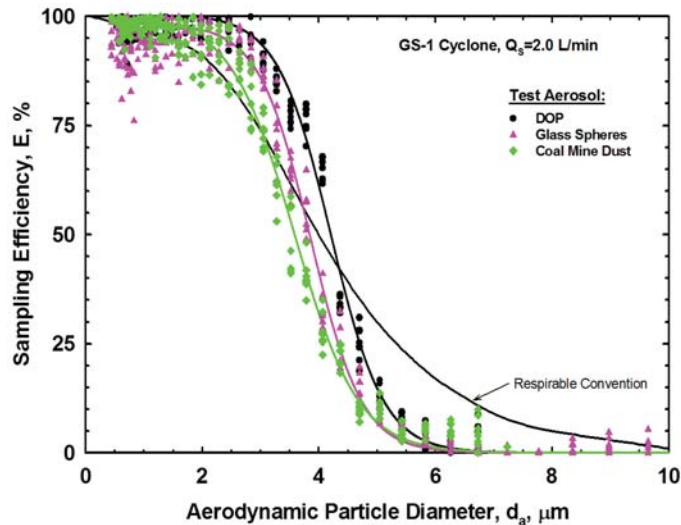


Collection efficiency relative to ISO 7708/CEN criteria

References

Kar, K. and Gautam, M., "Orientation Bias of the Isolated 10-mm Nylon Cyclone at Low Stream Velocity," *AIHA Journal*, Vol. 56, 1995, pp. 1090-1098, <http://doi.org/bdjrmv>

Trakumas, S., et al., *Performance Assessment of Personal Respirable Cyclone Samplers*, AIHce Presentation 191, 2003, <http://bit.ly/1NW1wgf> (PowerPoint presentation)

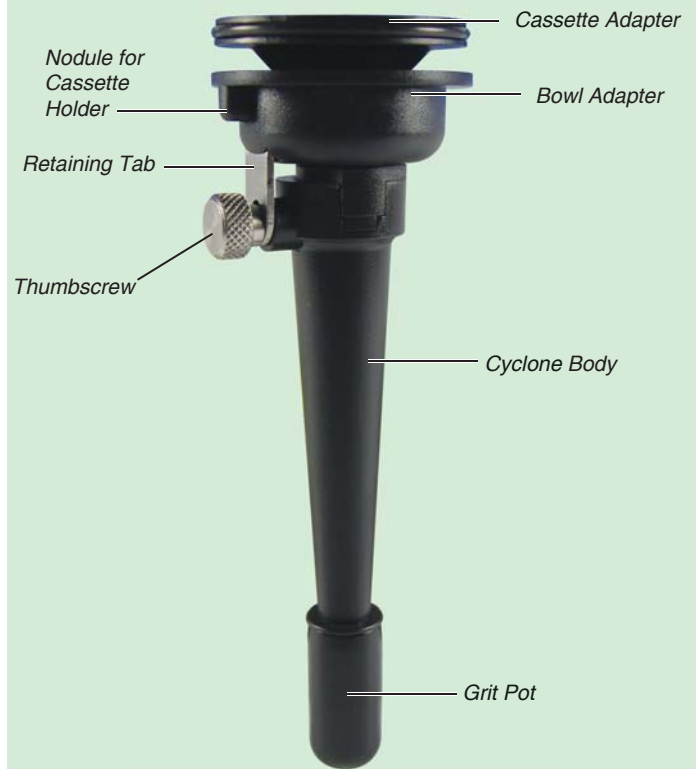

GS-1 Cyclone

Ordering Information

Description	Cat. No.
GS-1 Single-inlet Cyclone with bowl adapter, 37-mm cassette adapter, and grit pot	225-105
Accessories	
Replacement Cassette Adapter	
37 mm (supplied with cyclone)	225-102
25 mm	225-101
Filter Cassette/Cyclone Holder , for attaching a DPM or standard filter cassette to a worker's clothing in the breathing zone. May be used with or without a cyclone, required when using DPM Cassette with GS-1 Cyclone	225-1
Multi-purpose Calibration Jar	225-111
Replacement Grit Pots , pk/25	P225012

SKC Limited Warranty and Return Policy

SKC products are subject to the SKC Limited Warranty and Return Policy, which provides SKC's sole liability and the buyer's exclusive remedy. To view the complete SKC Limited Warranty and Return Policy, go to <http://www.skcinc.com/warranty>.

